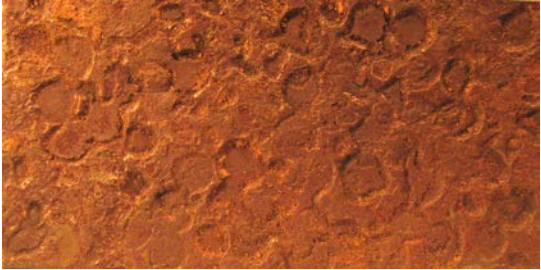

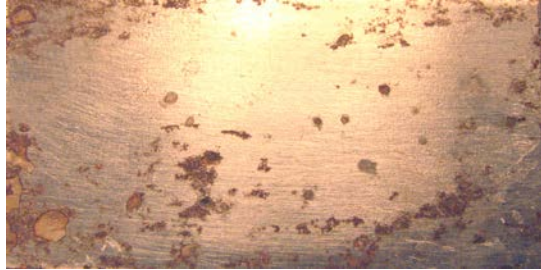
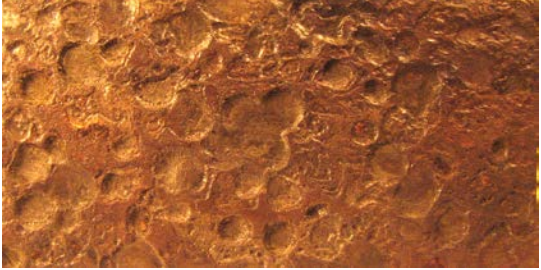

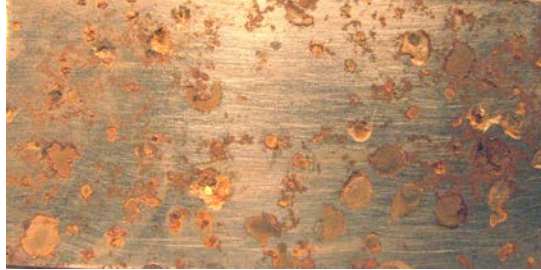

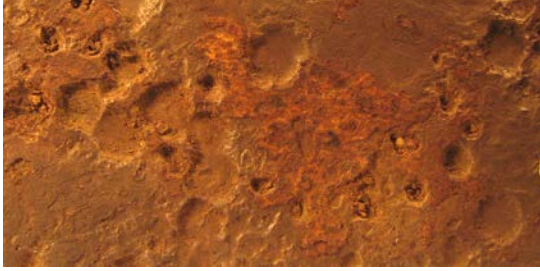



## SULPHUR IMMERSION WEIGHT LOSS / VISIBLE CORROSION TESTING

| <i>UNPROTECTED MILD STEEL</i>   | <i>LIMEWASH PROTECTED</i>   | <i>HOLDBLOCK PROTECTED</i>  |
|---|---|---|
|  <p>2 Weeks<br/>Weight Loss = 2.93 g (15.593%)</p>   |  <p>2 Weeks<br/>Weight Loss = 0.939 g (5.038%)</p>    |  <p>2 Weeks<br/>Weight Loss = 0.064 g (0.341%)</p>   |
|  <p>4 Weeks<br/>Weight Loss = 4.279 g (22.597%)</p>  |  <p>4 Weeks<br/>Weight Loss = 2.723 g (14.582%)</p>   |  <p>4 Weeks<br/>Weight Loss = 0.291 g (1.537%)</p>   |
|  <p>6 Weeks<br/>Weight Loss = 9.51 g (50.604%)</p> |  <p>6 Weeks<br/>Weight Loss = 5.542 g (29.471%)</p> |  <p>6 Weeks<br/>Weight Loss = 0.297 g (1.581%)</p> |

\*\*Weight Loss / Visual Corrosion test performed to evaluate the corrosion resistance of RBM HoldBlock with standard lime wash. \*\*